

AP Pro

Rugged Outdoor Wi-Fi that Goes the Distance



Deliver fast and reliable Wi-Fi in even the harshest conditions with the Peplink AP Pro. The AP Pro's sealed, all-metal IP67 enclosure stands up to dirt, water, and extreme temperatures for years of dependable operation in industrial, public safety, transport, and other applications. Built-in PoE gives you more installation options and reduces deployment costs. And intuitive console- and cloud-based control makes configuration and maintenance simple for everyone.

Heat, Cold, Dust, and Water. All in a Day's Work.

Built from tough aircraft-grade aluminum and sealed against water and dust, the AP Pro handles just about anything the factory floor, construction site, or Mother Nature can dish out. The AP Pro can also withstand temperatures from -46° to 65°C , and it's protected against ESD and surges, so it stays up and running in conditions that would quickly shut down other access points.



DC and PoE. The Power to Install Anywhere.

Power can be a problem in outdoor and industrial environments. But not for the AP Pro. With onboard DC and PoE connections, the AP Pro Duo and 300M can be easily installed where other access points can't, and you won't have to spend a fortune on cabling and electricians.



Onsite or in the Cloud.



Complete Control, Just a Click Away.

The AP Pro features Peplink's WLAN Controller for quick and simple onsite setup and configuration. Not onsite? Not a problem. Just open a Web browser and take control anywhere with our cloud-based InControl configuration and administration solution.



Specifications

	AP Pro	AP Pro 300M	AP Pro Duo
Product Code	APP-GN	APP-AGN	APP-AGN2
WAN Interface	1x 10/100M Ethernet Port		
LAN Interface	802.11b/g/n 300Mbps	802.11a/n or 802.11b/g/n 300Mbps	802.11a/n and 802.11b/g/n 600Mbps
Wi-Fi Operating Frequency	2412 – 2472 MHz	2412 – 2472 MHz or 5180 – 5825 MHz	2412 – 2472 MHz and 5180 – 5825 MHz
Antenna Connector	2 x Female N-Type Connector	4 x Female N-Type Connector	
Enclosure	IP67 Outdoor Metal Enclosure		
Dimension	9.0 x 12.2 x 2.6 inches / 230 x 310 x 66 mm		
Weight	5.84 pounds / 2.65 kg		
Power Input	Power over Ethernet 802.3af	Power over Ethernet 802.3at Device: 10V - 30V DC	
Power Consumption	13W (max.)	19.5W (max.)	25.5W (max.)
Operating Temperature	-40 - 149°F -40 - 65°C		
Humidity	15% – 95% (non-condensing)		
Certifications	FCC, CE, RoHS		
Warranty	1-Year Limited Warranty		

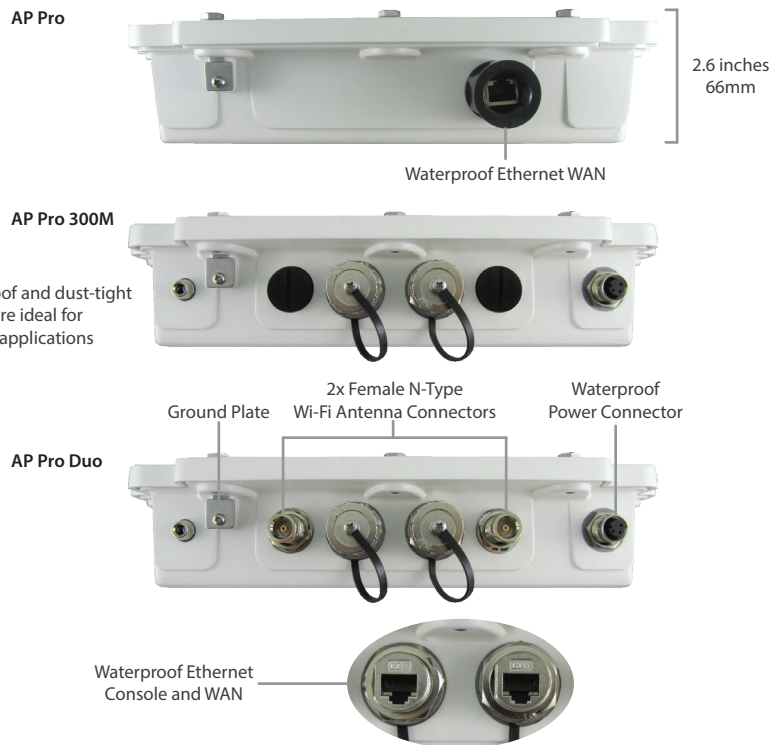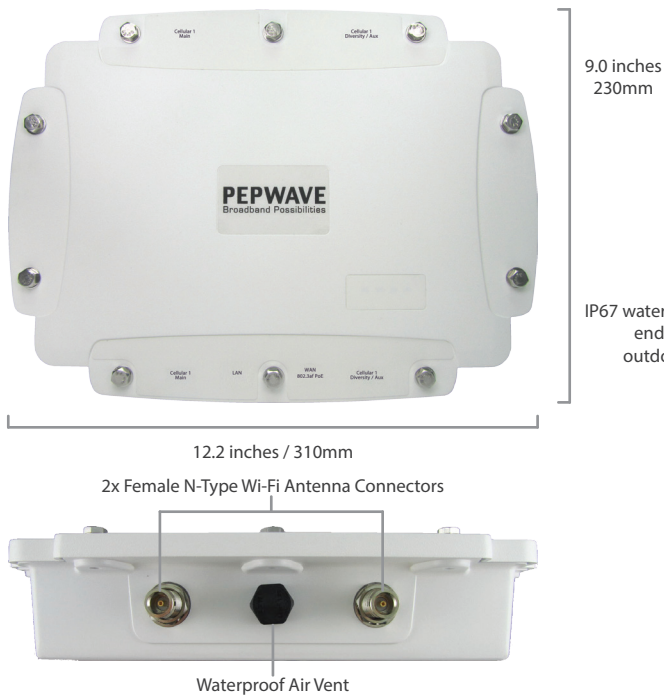

Ordering Information

AP Pro

Product Code	Product Name	Description
APP-GN	AP Pro	Industrial-grade 802.11b/g/n 300Mbps access point in metallic waterproof and dust-tight IP67 outdoor enclosure. Managable by InControl Cloud Management or Peplink Balance WLAN Controller.
APP-AGN	AP Pro 300M	Industrial-grade 802.11a/n or b/g/n 300Mbps access point in metallic waterproof and dust-tight IP67 outdoor enclosure. Managable by InControl Cloud Management or Peplink Balance WLAN Controller.
APP-AGN2	AP Pro Duo	Industrial-grade 802.11a/n and b/g/n 600Mbps access point in metallic waterproof and dust-tight IP67 outdoor enclosure. Managable by InControl Cloud Management or Peplink Balance WLAN Controller.

Features

Network

- Bridge Mode
- Router (NAT) Mode
- Wireless Distribution System (WDS)
- Support for PPPoE, Static IP, DHCP
- Management VLAN (802.1p)
- Spanning Tree Protocol (802.1d)

Radio

- Multiple SSID
- Auto Channel Selection
- Transmit Power Adjustment
- Neighbor AP Detection

Client Management

Per SSID

- VLAN with QoS (802.1p/802.1q)
- Bandwidth Control
- MAC Address Filtering
- Layer 2 Client Isolation
- Limit on Max. Number of Client

Per Client

- VLAN with RADIUS
- VLAN with VLAN Pool
- Bandwidth Control

Multicast Filter

- IGMP Snooping/Multicast Enhancement

AP Security

- Open, WEP
- 802.1x with Dynamic WEP
- WPA-PSK/RADIUS
- WPA2-PSK/RADIUS

Complete VPN Solution

PepVPN

- Site-to-Site VPN
- 256-bit AES Encryption
- Pre-shared Key Authentication
- Dynamic Routing

L2TP

Captive Portal

- By InControl
- By FusionHub Controller
- By Balance WLAN Controller

Device Management

- Web Administrative Interface
- InControl Cloud Management
- FusionHub Controller
- Peplink Balance WLAN Controller
- SNMP v1, v2c and v3

Certification

FCC, CE, RoHS

United States

T: +1 (650) 450 9669

E: sales@pepwave.com

www.pepwave.com

www.4gon.co.uk info@4gon.co.uk Tel: +44 (0)1245 808295 Fax: +44 (0)1245 808249

©Pepwave. All rights reserved. Pepwave, the Pepwave logo, and SpeedFusion are trademarks of Pepwave Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. All specifications are subject to change without notice.

PEPWAVE
Broadband Possibilities